



Low Loss Headers

Key Features

- High quality mild steel
- 5 Year manufacturing warranty
- White gloss powder coated finish
- Highly efficient injection foam insulation
- ISO9001 certified quality management


WH Cylinders manufacture a range of Low Loss Headers available in a white gloss case finish with high efficiency injection foam insulation.

All of our headers are manufactured from high quality mild steel, under an ISO9001 certified quality management system in our purpose made manufacturing facility in Manchester.





Dimensions

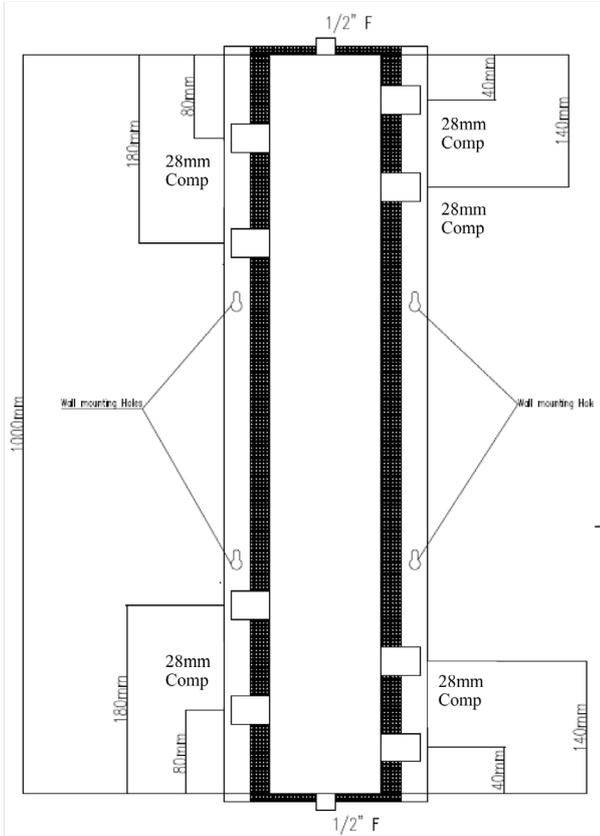

Capacity (L)	Max Duty (KW)		Overall Width (mm)	Overall Height (mm)	Number of connections
	11°C Delta T	5°C Delta T			
9 Litres	180KW	45KW	170mm	1050mm	8 x 1" Female & 2 x 1/2" Female

Nominal capacity (Litres)		9L
Approximate Weight (KG)	Empty	7
	Full	16
	Packaged	10
Header Material		Mild Steel
Insulation type		Polyurethane (PU) Insulation
Insulation thickness (mm)		50
Standing heat loss @ 600C (kWh/24hrs)		0.23
GWP of Insulation		0
ODP of Insulation		Less than 5

* Alternative sized Low Loss Headers available on request

** Optional connection kits available including 8 x compression connectors, automatic air vent and drain