



## ecoGEO<sup>+</sup> HP

---

R410A 12-45kW/15-60kW/20-85kW  
Brine to Water Heat Pumps  
with Inverter Technology



# ecoGEO<sup>+</sup> HP

R410A




## Models

ecoGEO<sup>+</sup> 12-45

ecoGEO<sup>+</sup> 15-60

ecoGEO<sup>+</sup> 20-85



Three phase  
400 VAc

## Options

### ecoGEO<sup>+</sup> HP1

DHW \*  
Heating  
Passive cooling \*\*  
Pool

### ecoGEO<sup>+</sup> HP3

DHW \*  
Heating  
Pool  
Passive cooling \*\*  
Active cooling

\* DHW production with an external tank  
\*\* External passive cooling management

## Services



DHW



Heating



Cooling



Pool

## Compatible production systems



Heat./Cool. floor




Fancoils



Radiators

## Management of shunt groups



## Performance



Simultaneous production



Hybrid source



HTR Technology



Lifespan

## Cascade




ecoSMART  
Supervisor

## Characteristics

- Modulating thermal output control across a wide range (25%–100%) and modulating flow control in both source and production circuits (20%–100%).
- R410A refrigerant.
- Inverter technology.
- Single scroll compressor unit.
- High Temperature Recovery (HTR) system for DHW production up to 70 °C without auxiliary support and simultaneous production of DHW and heating/cooling (ecoGEO+ HP 20–85 models).
- Integrated management of up to five different flow temperatures, two buffer tanks (heating and cooling), one DHW tank, one swimming pool, and time scheduling of DHW recirculation.
- Integrated control of external auxiliary backup systems—on/off or modulating (electric heaters, boilers, etc.).
- Cascade control of up to six heat pumps via ecoSMART Supervisor.
- Multi-source ground loop management via ecoSMART e-source.
- Integrated management of simultaneous heating/cooling production and emission systems, depending on the system layout.
- External passive cooling management.
- Active cooling via cycle inversion integrated in HP3 models.
- Available in three-phase version.
- Integrated photovoltaic hybridisation.
- Integrated energy meters for monitoring electrical consumption, thermal output (heating/cooling), and instantaneous as well as seasonal efficiency monthly and annual.

## Operational chart

ecoGEO+ HP 12-45 | ecoGEO+ HP 15-60 | ecoGEO+ HP 20-85

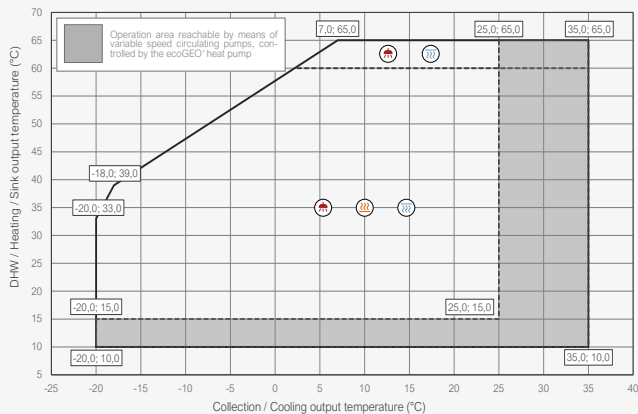

# ecoGEO<sup>+</sup> HP 12-45


Brine to water heat pumps with Inverter technology and R410A refrigerant



SPECIFICATIONS ecoGEO+ HP		ecoGEO+ 12-45		
		HP1	HP3	
APPLICATION	Place of installation	-	Indoor	
	Collection system	-	Ground source / Open loop	
	DHW, Heating and Pool heating	-	▪	
	External passive cooling control	-	▪	
	Integrated active cooling	-	▪	
PERFORMANCE	Compressor modulation range	%	25 - 100	
	<sup>(2)</sup> Heating power output / COP B0W35	kW / -	12.0 - 44.0 / 4.4	
	<sup>(2)</sup> Heating power output / COP B0W55	kW / -	14.1 - 38.0 / 2.5	
	<sup>(2)</sup> Cooling power output / EER B30W7	kW / -	-	11.3 - 37.9 / 4.4
	<sup>(6)</sup> Max. DHW temperature without / with support	°C	60 / 80	
	<sup>(6)</sup> Maximum noise power level (LWA)	dB (A)	58	
	Energy label / $\eta_s$ / SCOP W35 average clim. with control	-	A+++ / 191% / 4.88	
Energy label / $\eta_s$ / SCOP W55 average clim. with control	-	A++ / 144% / 3.71		
OPERATION LIMITS	Distribution / Set heating outlet temperature range	°C	10 - 60 / 20 - 60	
	Distribution / Set cooling outlet temperature range	°C	-	5 - 30 / 7 - 30
	Collection temperature range in heating / cooling mode	°C	-20 - 35 / 10 - 60	
	Minimum / Maximum refrigerant circuit pressure	bar	2.0 / 45.0	
	Collection / Production circuit pressure range	bar	0.7 - 10.0 / 0.7 - 10.0	
WORKING FLUIDS	R410A refrigerant load (GWP: 2088)	kg	4.40	
	Compressor oil type / load	kg	POE 160SZ / 3.3 - 3.8	
	Primary circ. flow rate (Pmax, B0W35) $\Delta T$ 3°C / $\Delta T$ 5°C	m <sup>3</sup> /h	10.1 / 6.0	
	Secondary circ. flow rate (Pmax, B0W35) $\Delta T$ 5°C / $\Delta T$ 7°C	m <sup>3</sup> /h	7.6 / 5.4	
CONTROL ELECTRICAL DATA	<sup>(8)</sup> 1/N/PE 230 V / 50-60 Hz	-	▪	
	<sup>(9)</sup> Recommended external protection	-	C1A	
	Transformer primary circuit fuse	A	0.63	
	Transformer secondary circuit fuse	A	4.0	
HEAT PUMP ELECTRICAL DATA: THREE-PHASE VERSION	<sup>(8)</sup> 3/N/PE 400 V / 50-60 Hz	-	▪	
	<sup>(9)</sup> Recommended external protection	-	C40A	
	<sup>(2)</sup> Maximum consumption B0W35	kW / A	10.9 / 17.7	
	<sup>(2)</sup> Maximum consumption B0W55	kW / A	15.5 / 24.6	
	<sup>(2)</sup> Maximum consumption	kW / A	18.1 / 28.6	
	<sup>(7)</sup> Minimum / Maximum starting current	A	5.6 / 9.0	
Correction of cos $\phi$	-	0.96 / 1		
DIMENSIONS & WEIGHT	Height x width x depth	mm	1074x879x791	
	Empty weight (without packaging)	kg	295	307


- Air-to-water by means of a brine-to water heat pump combined with a hydraulic outdoor air unit.
- In compliance with EN 14511, including circulation pumps, fan and compressor driver consumptions.
- Production flow rate according to EN 14511.
- Considering a heat slope from 20 to 50 °C in absence of consumption.
- Considering support provided by an emergency electrical heater or HTR. Max. DHW temp. with HTR can be limited by the compressor discharge temp.
- In compliance with EN 12102.
- Starting current depends on the working conditions of the hydraulic circuits.
- The admissible voltage range for proper operation of the heat pump is  $\pm 10\%$ .
- Maximum consumption can vary significantly according to working conditions, or if the compressor's operation range is restricted. Consult the technical service manual for more information.
- Certification in process.


## Dimensions and hydraulic connections

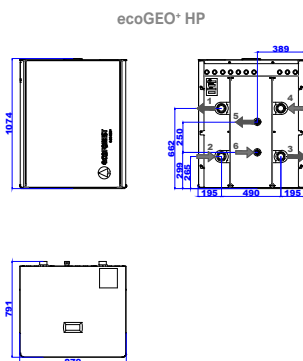


- Secondary outlet 2" M
- Secondary inlet 2" M
- Primary outlet 2" M
- Primary inlet 2" M
- HTR outlet 1 1/2" M
- HTR inlet 1 1/2" M

## Pressure drop

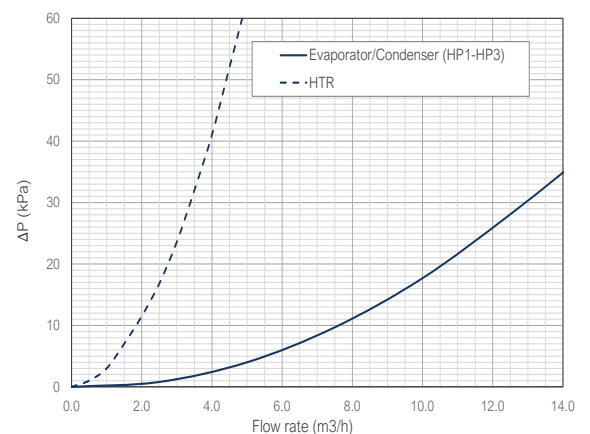

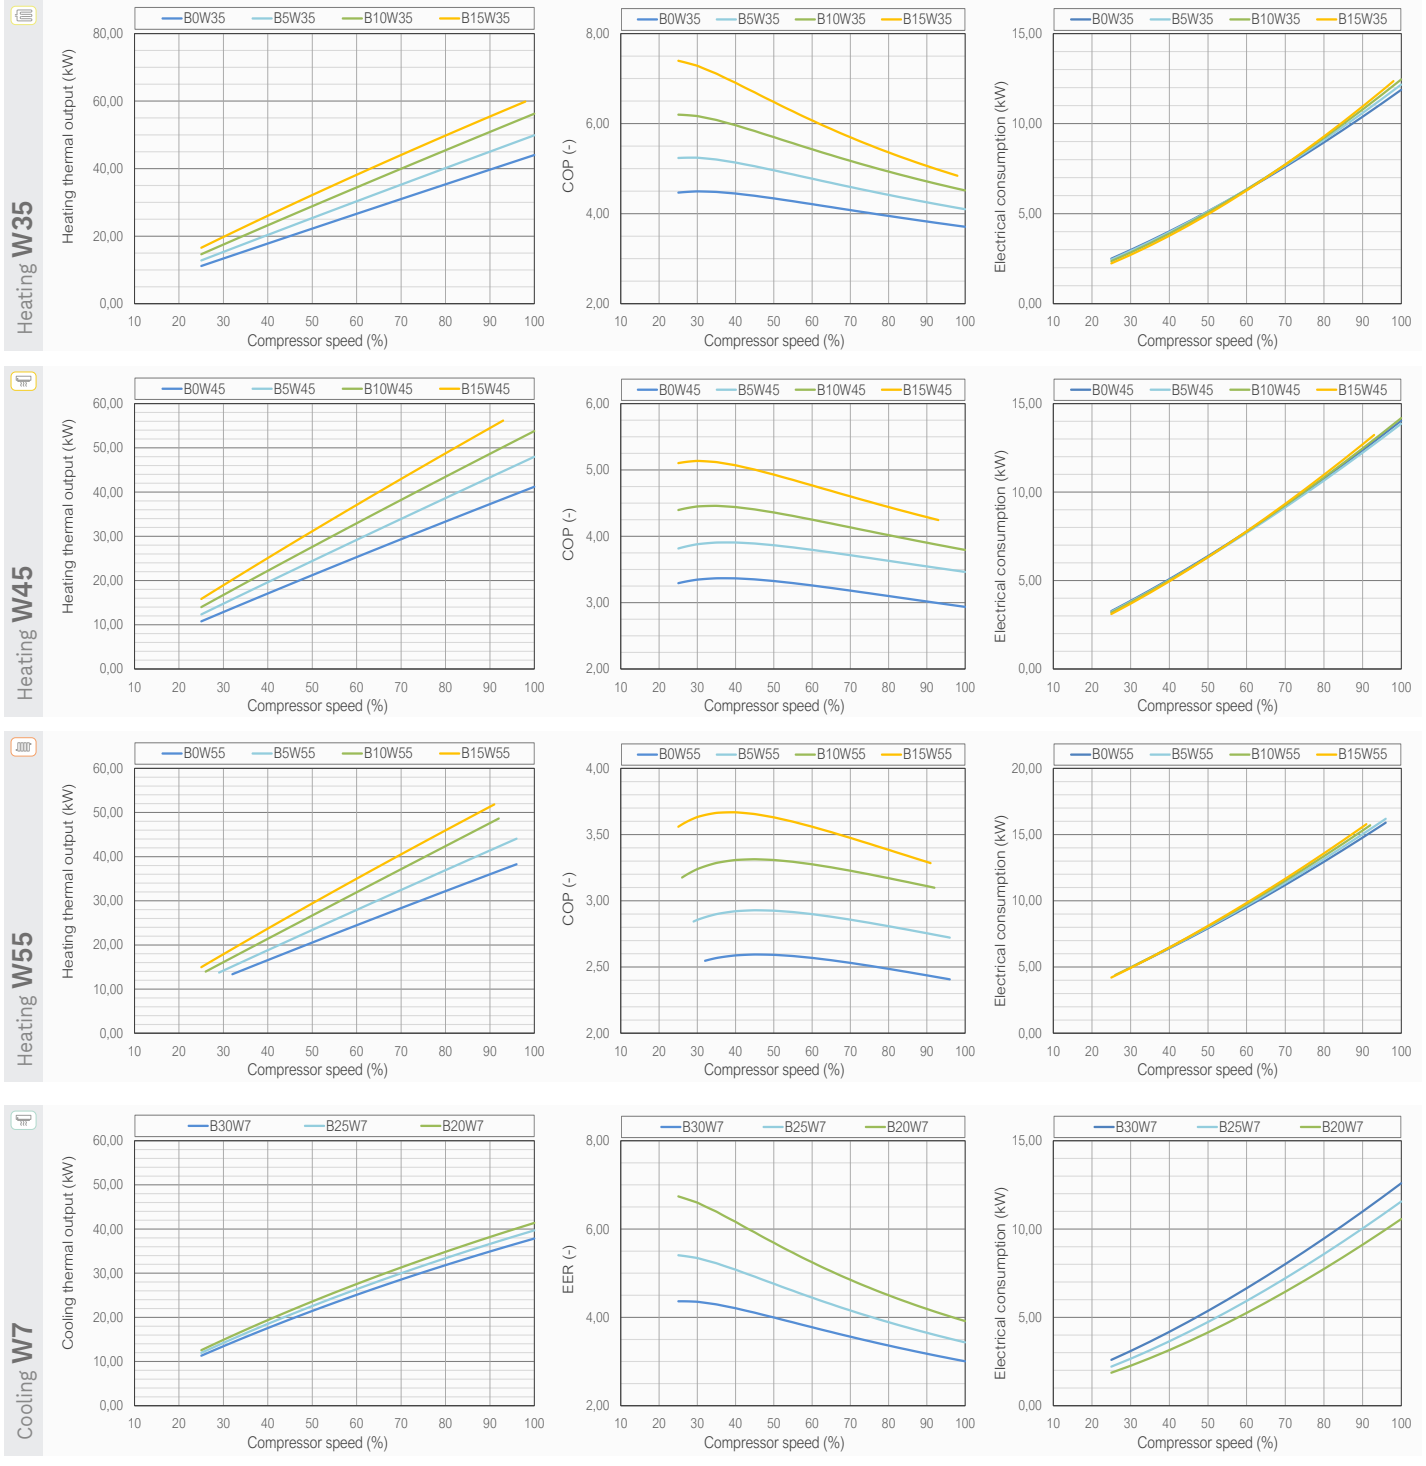

### Thermal power - Brine system temperature

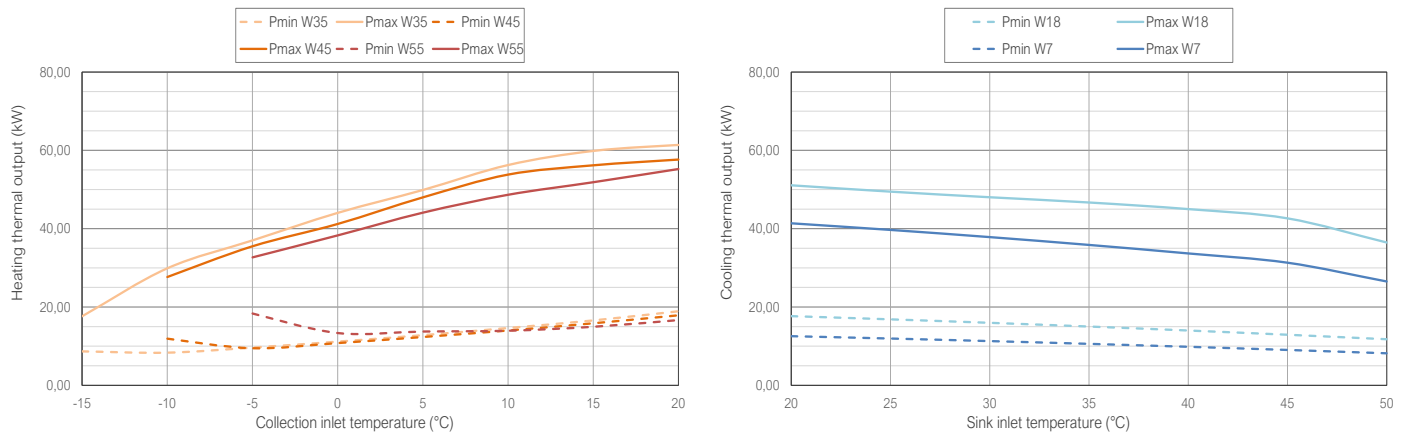

# ecoGEO<sup>+</sup> HP 15-60


Brine to water heat pumps with Inverter technology and R410A refrigerant



SPECIFICATIONS ecoGEO+ HP		ecoGEO+ 15-60		
		HP1	HP3	
APPLICATION	Place of installation	-	Indoor	
	Collection system	-	Ground source / Open loop	
	DHW, Heating and Pool heating	-	▪	
	External passive cooling control	-	▪	
	Integrated active cooling	-	▪	
PERFORMANCE	Compressor modulation range	%	25 - 100	
	<sup>(2)</sup> Heating power output / COP B0W35	kW / -	14.9 - 57.5 / 4.5	
	<sup>(2)</sup> Heating power output / COP B0W55	kW / -	16.2 - 52.0 / 2.5	
	<sup>(2)</sup> Cooling power output / EER B30W7	kW / -	-	16.6 - 55.0 / 4.0
	<sup>(6)</sup> Max. DHW temperature without / with support	°C	60 / 80	
	<sup>(6)</sup> Maximum noise power level (LWA)	dB (A)	62	
	Energy label / $\eta_s$ / SCOP W35 average clim. with control	-	A+++ / 200% / 5.12	
Energy label / $\eta_s$ / SCOP W55 average clim. with control	-	A++ / 148% / 3.82		
OPERATION LIMITS	Distribution / Set heating outlet temperature range	°C	10 - 60 / 20 - 60	
	Distribution / Set cooling outlet temperature range	°C	-	5 - 30 / 7 - 30
	Collection temperature range in heating / cooling mode	°C	-20 - 35 / 10 - 60	
	Minimum / Maximum refrigerant circuit pressure	bar	2.0 / 45.0	
	Collection / Production circuit pressure range	bar	0.7 - 10.0 / 0.7 - 10.0	
WORKING FLUIDS	R410A refrigerant load (GWP: 2088)	kg	6.00	
	Compressor oil type / load	kg	POE 160SZ / 3.0	
	Primary circ. flow rate (Pmax, B0W35) $\Delta T$ 3°C / $\Delta T$ 5°C	m <sup>3</sup> /h	13.7 / 8.2	
	Secondary circ. flow rate (Pmax, B0W35) $\Delta T$ 5°C / $\Delta T$ 7°C	m <sup>3</sup> /h	10.1 / 7.2	
CONTROL ELECTRICAL DATA	<sup>(8)</sup> 1/N/PE 230 V / 50-60 Hz	-	▪	
	<sup>(9)</sup> Recommended external protection	-	C1A	
	Transformer primary circuit fuse	A	0.63	
	Transformer secondary circuit fuse	A	4.0	
HEAT PUMP ELECTRICAL DATA: THREE-PHASE VERSION	<sup>(8)</sup> 3/N/PE 400 V / 50-60 Hz	-	▪	
	<sup>(9)</sup> Recommended external protection	-	C50A	
	<sup>(2)</sup> Maximum consumption B0W35	kW / A	14.3 / 23.8	
	<sup>(2)</sup> Maximum consumption B0W55	kW / A	20.4 / 32.3	
	<sup>(2)</sup> Maximum consumption	kW / A	23.7 / 37.0	
	<sup>(7)</sup> Minimum / Maximum starting current	A	7.5 / 11.8	
Correction of cos $\phi$	-	0.96 / 1		
DIMENSIONS & WEIGHT	Height x width x depth	mm	1074x879x791	
	Empty weight (without packaging)	kg	322	336


- Air-to-water by means of a brine-to water heat pump combined with a hydraulic outdoor air unit.
- In compliance with EN 14511, including circulation pumps, fan and compressor driver consumptions.
- Production flow rate according to EN 14511.
- Considering a heat slope from 20 to 50 °C in absence of consumption.
- Considering support provided by an emergency electrical heater or HTR. Max. DHW temp. with HTR can be limited by the compressor discharge temp.
- In compliance with EN 12102.
- Starting current depends on the working conditions of the hydraulic circuits.
- The admissible voltage range for proper operation of the heat pump is  $\pm 10\%$ .
- Maximum consumption can vary significantly according to working conditions, or if the compressor's operation range is restricted. Consult the technical service manual for more information.
- Certification in process.


## Dimensions and hydraulic connections

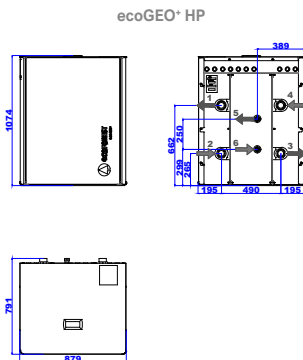


- Secondary outlet 2" M
- Secondary inlet 2" M
- Primary outlet 2" M
- Primary inlet 2" M
- HTR outlet 1 1/2" M
- HTR inlet 1 1/2" M

## Pressure drop

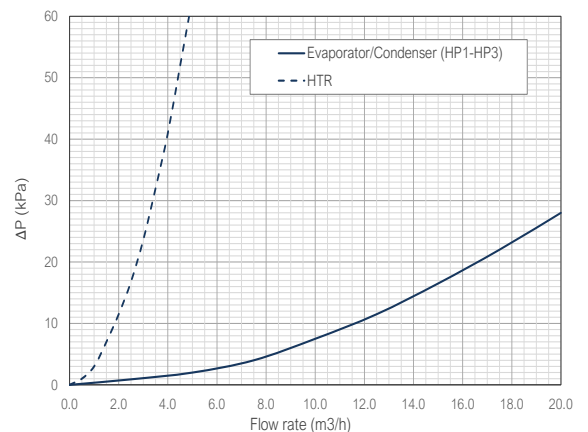

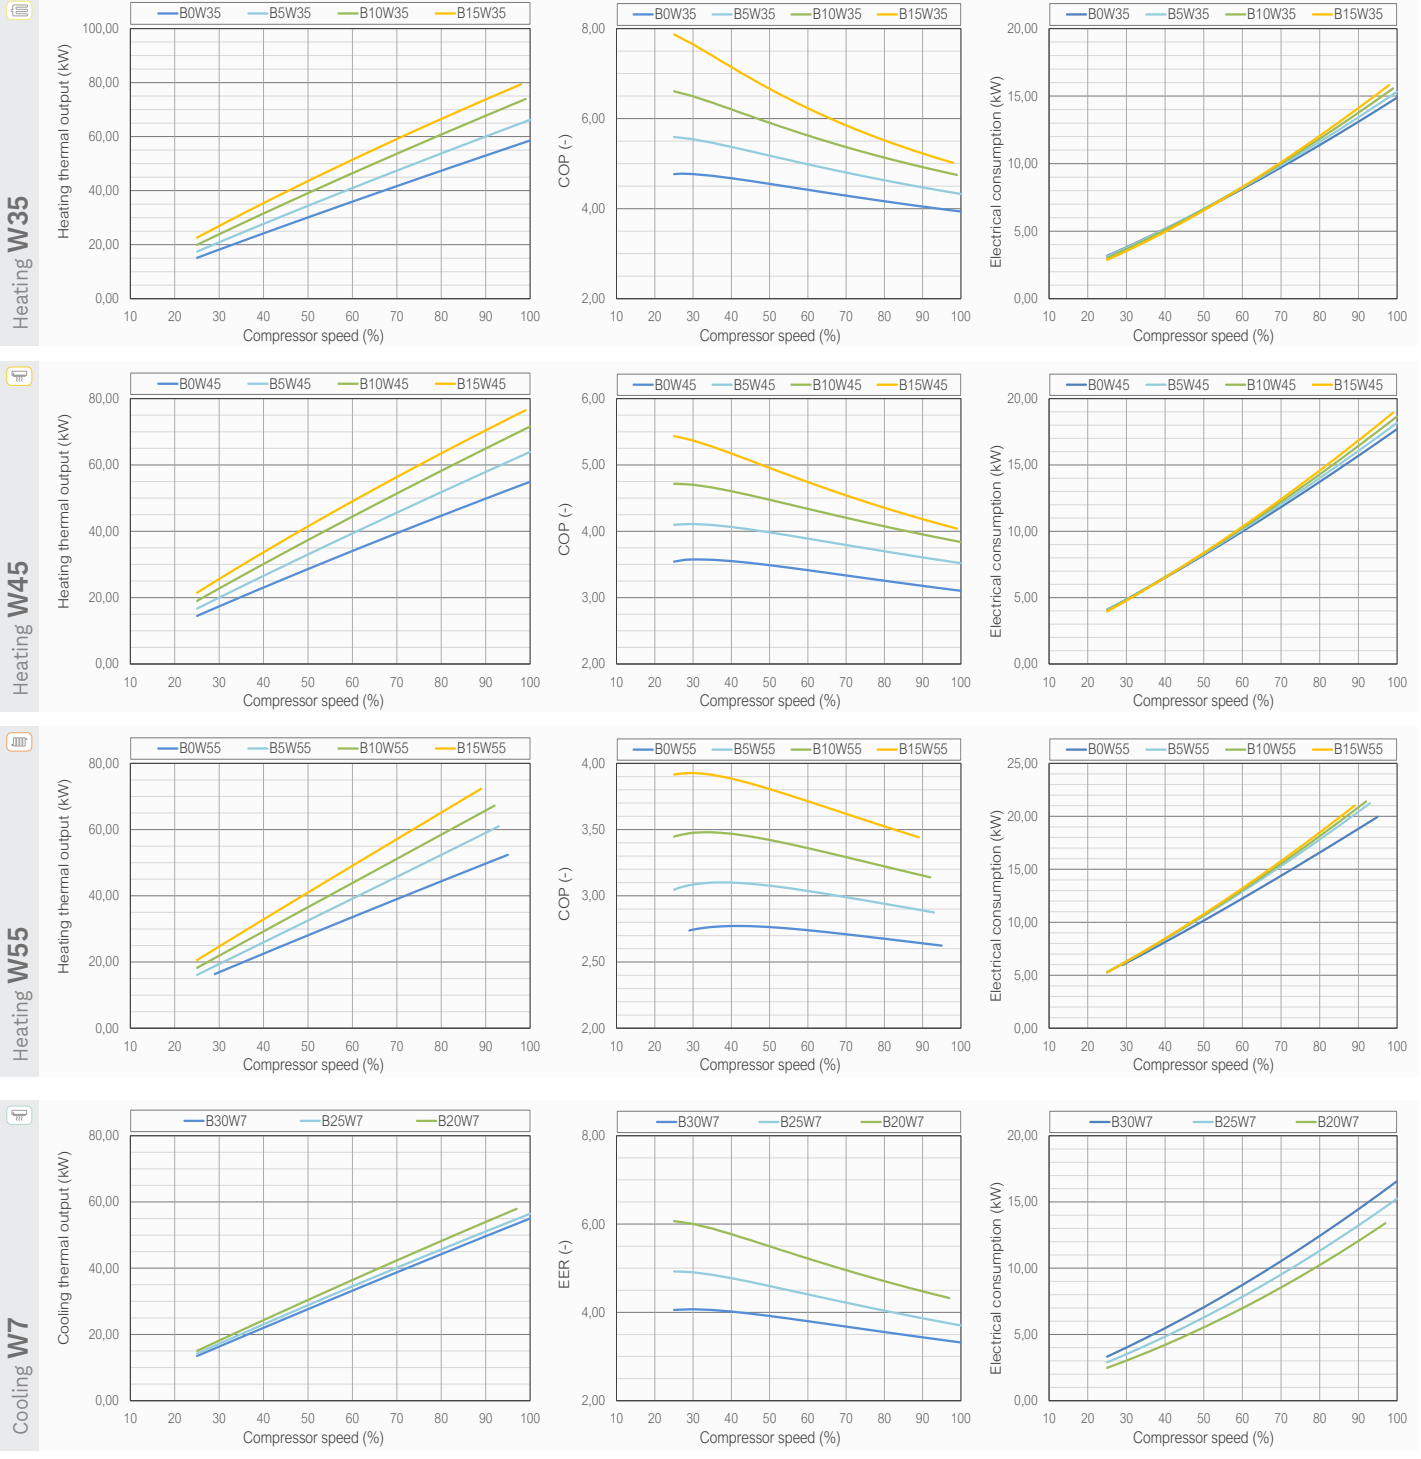

### Thermal power - Brine system temperature

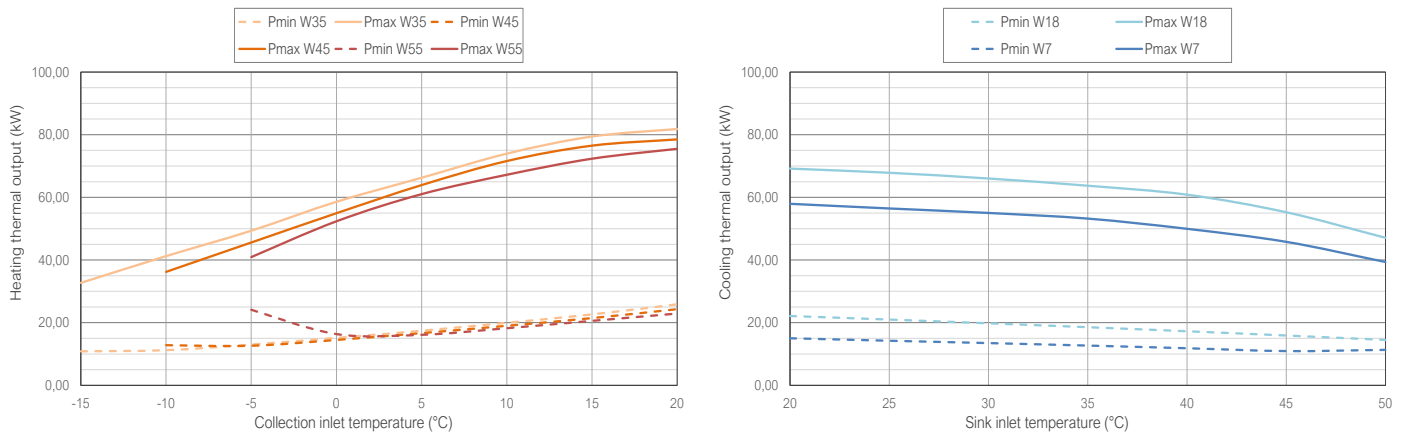

# ecoGEO<sup>+</sup> HP 20-85


Brine to water heat pumps with Inverter technology and R410A refrigerant



SPECIFICATIONS ecoGEO+ HP		ecoGEO+ 20-85		
		HP1	HP3	
APPLICATION	Place of installation	-	Indoor	
	Collection system	-	Ground source / Open loop	
	DHW, Heating and Pool heating	-	▪	
	External passive cooling control	-	▪	
	Integrated active cooling	-	▪	
PERFORMANCE	Compressor modulation range	%	25 - 100	
	<sup>(2)</sup> Heating power output / COP B0W35	kW / -	21.5 - 86.5 / 4.6	
	<sup>(2)</sup> Heating power output / COP B0W55	kW / -	27.6 - 76.2 / 2.7	
	<sup>(2)</sup> Cooling power output / EER B30W7	kW / -	-	21.4 - 73.7 / 4.5
	<sup>(6)</sup> Max. DHW temperature without / with support	°C	60 / 80	
	<sup>(6)</sup> Maximum noise power level (LWA)	dB (A)	65	
	Energy label / η <sub>s</sub> / SCOP W35 average clim. with control	-	A+++ / 197% / 5.05	
Energy label / η <sub>s</sub> / SCOP W55 average clim. with control	-	A++ / 146% / 3.75		
OPERATION LIMITS	Distribution / Set heating outlet temperature range	°C	10 - 60 / 20 - 60	
	Distribution / Set cooling outlet temperature range	°C	-	5 - 30 / 7 - 30
	Collection temperature range in heating / cooling mode	°C	-20 - 35 / 10 - 60	
	Minimum / Maximum refrigerant circuit pressure	bar	2.0 / 45.0	
	Collection / Production circuit pressure range	bar	0.7 - 10.0 / 0.7 - 10.0	
WORKING FLUIDS	R410A refrigerant load (GWP: 2088)	kg	10.00	
	Compressor oil type / load	kg	POE 160SZ / 6.7 - 7.7	
	Primary circ. flow rate (Pmax, B0W35) ΔT 3°C / ΔT 5°C	m <sup>3</sup> /h	20.3 / 12.2	
	Secondary circ. flow rate (Pmax, B0W35) ΔT 5°C / ΔT 7°C	m <sup>3</sup> /h	14.9 / 10.7	
CONTROL ELECTRICAL DATA	<sup>(8)</sup> 1/N/PE 230 V / 50-60 Hz	-	▪	
	<sup>(9)</sup> Recommended external protection	-	C1A	
	Transformer primary circuit fuse	A	0.63	
	Transformer secondary circuit fuse	A	4.0	
HEAT PUMP ELECTRICAL DATA: THREE-PHASE VERSION	<sup>(8)</sup> 3/N/PE 400 V / 50-60 Hz	-	▪	
	<sup>(9)</sup> Recommended external protection	-	C63A	
	<sup>(2)</sup> Maximum consumption B0W35	kW / A	20.3 / 31.8	
	<sup>(2)</sup> Maximum consumption B0W55	kW / A	29.6 / 45.1	
	<sup>(2)</sup> Maximum consumption	kW / A	33.7 / 52.9	
	<sup>(7)</sup> Minimum / Maximum starting current	A	10.8 / 16.7	
Correction of cos Ø	-	0.96 / 1		
DIMENSIONS & WEIGHT	Height x width x depth	mm	1074x1009x916	
	Empty weight (without packaging)	kg	450	465


- Air-to-water by means of a brine-to water heat pump combined with a hydraulic outdoor air unit.
- In compliance with EN 14511, including circulation pumps, fan and compressor driver consumptions.
- Production flow rate according to EN 14511.
- Considering a heat slope from 20 to 50 °C in absence of consumption.
- Considering support provided by an emergency electrical heater or HTR. Max. DHW temp. with HTR can be limited by the compressor discharge temp.
- In compliance with EN 12102.
- Starting current depends on the working conditions of the hydraulic circuits.
- The admissible voltage range for proper operation of the heat pump is ±10%.
- Maximum consumption can vary significantly according to working conditions, or if the compressor's operation range is restricted. Consult the technical service manual for more information.
- Certification in process.

## Dimensions and hydraulic connections



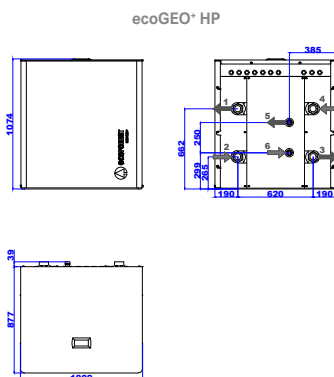


- Secondary outlet  
2 ½" M
- Secondary inlet  
2 ½" M
- Primary outlet  
2 ½" M
- Primary inlet  
2 ½" M
- HTR outlet  
1 ½" M
- HTR inlet  
1 ½" M




## Pressure drop

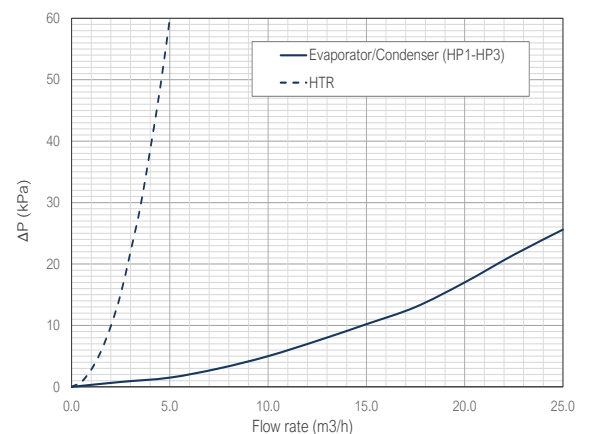




Heating W35

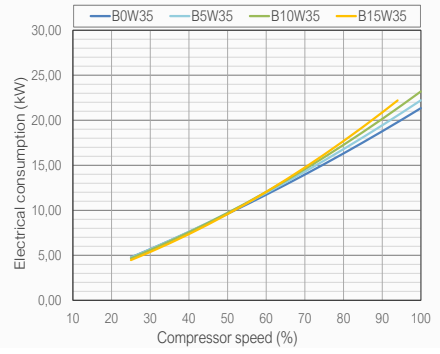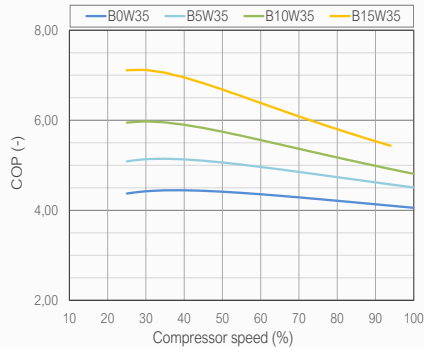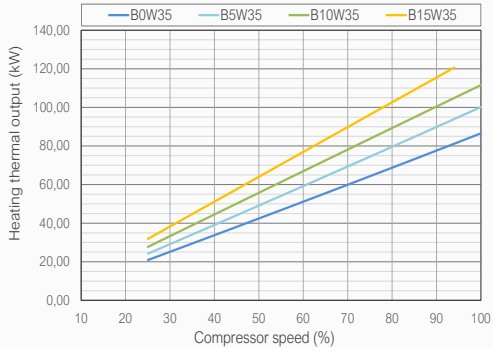




Heating W45

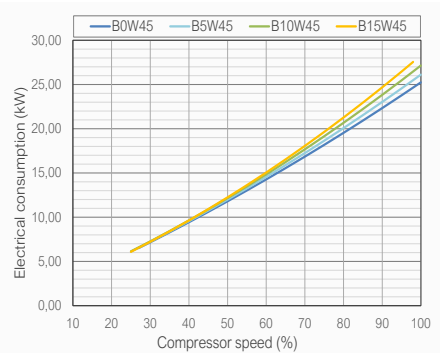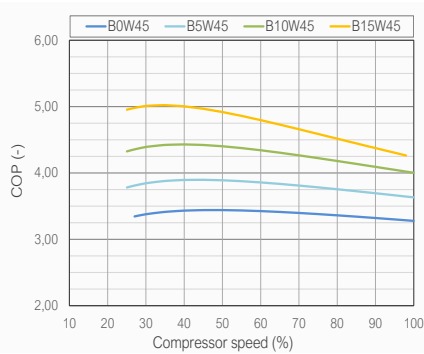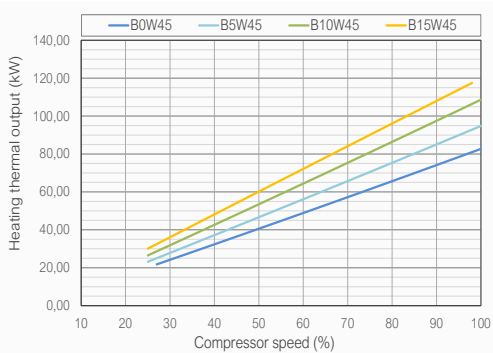



Heating W55

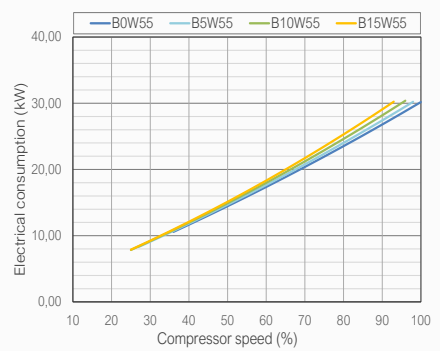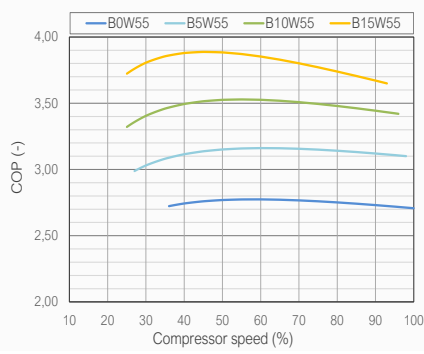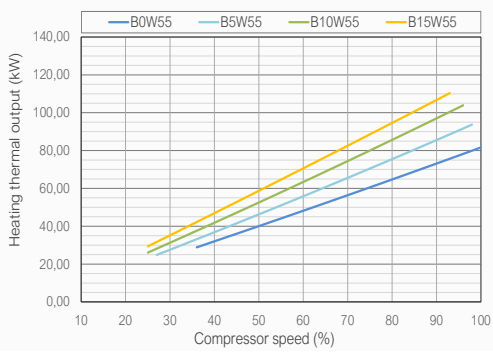

Cooling W7

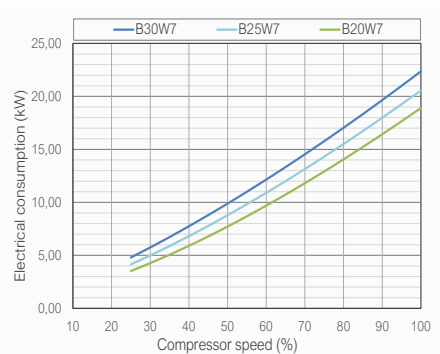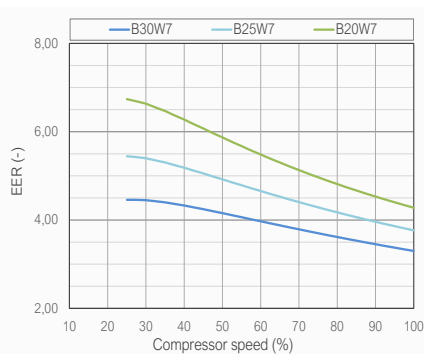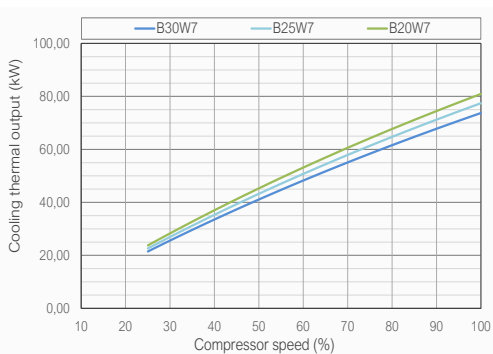

Thermal power - Brine system temperature

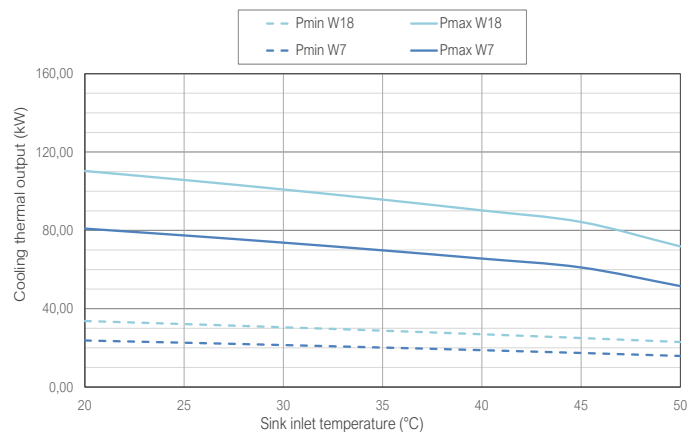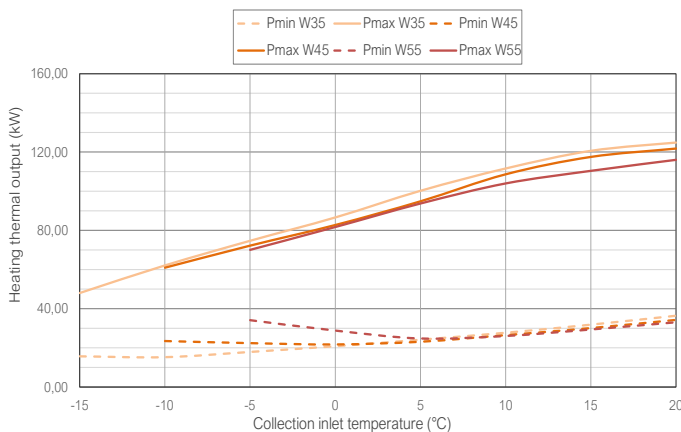



May 2026